

XMP-6250

Hardware User Manual



Contents

1. Introduction	1
1.1. Package contents	1
1.2. Installation	1
1.3. Physical view	3
2. Technical Data	4
2.1. Specifications	4

1. Introduction

This document describes the hardware of the XMP-6250.

1.1. Package contents



Media Player Unit



AC Adapter
(with select power plug)



Wireless Antenna



HDMI Cable



Velcro (2 sets)



Power and Micro SD
card brackets

NOT INCLUDED: A USB mouse is required for system setup

1.2. Installation


Attach wireless antenna

Attach the wireless antenna as shown below, and then screw antenna clockwise onto the post.



Mounting Option 1: [Wall Mount]

The player has built-in wall mount bracket, screw thread: M4

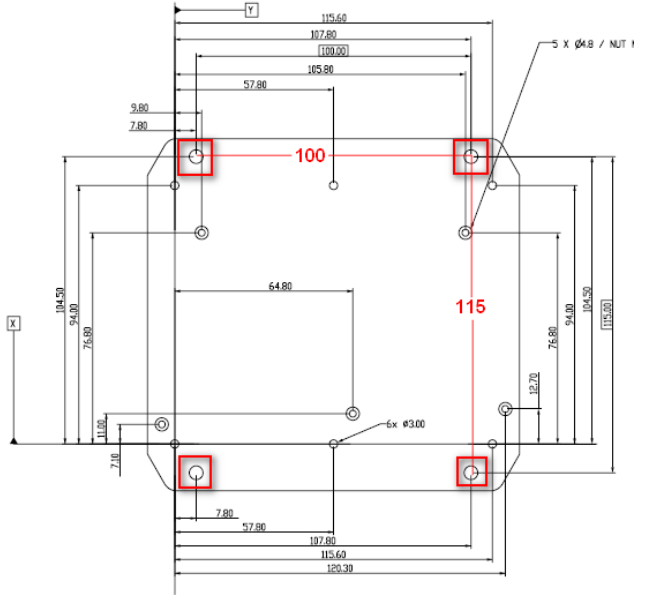


Mounting Option 2: [Attach the player on the back of the monitor using Velcro]

1. Separate the Velcro pads, and stick on the bottom of player.
2. Stick the other Velcro pad onto the back of monitor, and then attach the player to it.
3. Use HDMI cable to connect player and the monitor.



1.3. Physical view

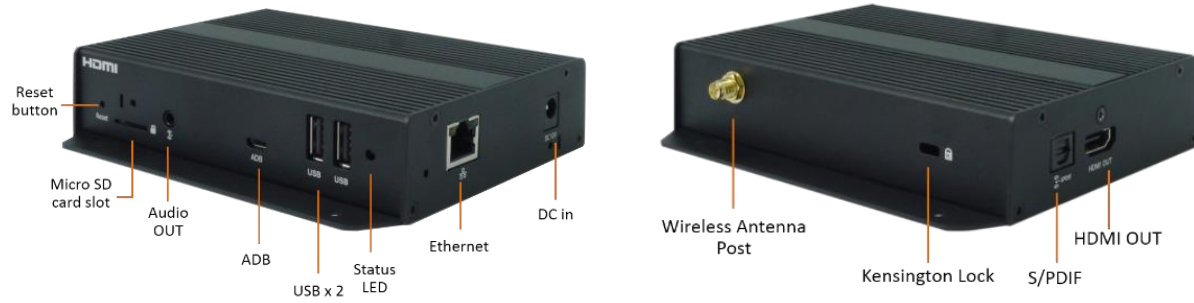

Physical features (left to right in above illustration)

- Reset button to perform factory reset
- Micro SD card slot
- 3.5mm Audio out
- Micro USB for ADB , Android debug console port
- 2 x USB ports for USB content update and configuration
- Power(green) and Status(orange) LED indicator
- Ethernet port for network content update
- DC input port
- Wireless antenna post
- Kensington lock
- S/PDIF Audio out
- HDMI connector for digital video and audio combined **OUTPUT**

2. Technical Data

2.1. Specifications

	XMP-6250
Video format support	H.264 (up to 1080p,10Mbps) VC-1 (up to 1080p,10Mbps) MPEG-4 ASP (up to 1080p,10Mbps) MPEG-2 (up to 1080p,10Mbps) POPAl Screen Media Standards : S6 to S12, E4,E7,E8
Image format support	JPEG,PNG up to 1920x1080 POPAl Screen Media Standards : S1 to S3, E1 to E3
Audio codec support	MP3 up to 320Kbps POPAl Screen Media Standards : S4, S5
Dynamic content	W3C HTML5 (HTML, CSS, JavaScript) W3C SMIL 3.0 instructions (sub-set)
Physical I/O connectors	HDMI 1.4 for AV OUTPUT USB 2.0 x 2 RJ45 Ethernet port Wireless antenna port Micro USB for ADB Micro SD card slot LED: Power(green)/Status(orange)
Local storage	8 GB eMMC with Micro SD card expansion slot
Accessories	AC adapter(UL/CB/PSE certified power supplies) HDMI cable Wireless antenna Velcro (2 sets) Micro SD card slot bracket/screw x1 Power jack bracket/screw x1
Power requirement	12V 1.5A DC
Power consumption	Average 6 W
Environmental	Operating temperature: -20 to 50° C / -68 to 122° F Humidity: 10 – 85% @ 45° C /113° F non-condensing
Dimensions	138.60x 128.10x30.20 mm (5.45x5.04x1.18 inches, incl. base/mounting bracket)
Weight	334.2 g 0.74 lbs
Certifications	CE/FCC/IC
Warranty	One-year limited parts & labor